


BK-200A

HHR-200A (OLD)

STANDARD TYPE
4/5A SIZE (HR17/43)

N TYPE


DIMENSIONS (MM)

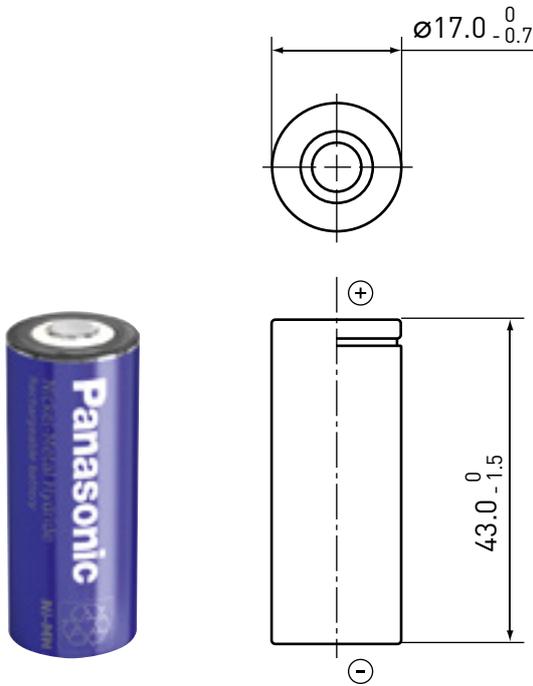

| Specifications | | BK-200A |
|---|--------------------------|--------------|
| Diameter (mm) | | 17.0 +0/-0.7 |
| Total height (mm) | | 43.0 +0/-1.5 |
| Approximate weight (g) | | 32 |
| Nominal voltage (V) | | 1.2 |
| Discharge capacity*1 | Typical capacity*2 (mAh) | 2,040 |
| | Nominal capacity*3 (mAh) | 2,000 |
| Approx. internal impedance at 1,000Hz at charged state (mΩ) | | 20 |
| Charge | Standard (mA x hrs.) | 200 x 16 |
| | Rapid*4 (mA x hrs.) | 1,700 x 1.2 |
| Charge (°C) | Standard | 0 to 45 |
| | Rapid | 0 to 40 |
| Discharge (°C) | | -10 to 65 |
| Ambient temperature | <1 year | -20 to 35 |
| | <6 months | -20 to 45 |
| | <1 month | -20 to 55 |
| | <1 week | -20 to 65 |

*1 After charging at 0.1It for 16 hours, discharging at 0.2It.
 *2 Average capacity (mAh). For reference only.
 *3 Rated capacity (mAh).
 *4 Need specially designed control system. Please contact Panasonic for details.

TYPICAL CHARGE CHARACTERISTICS

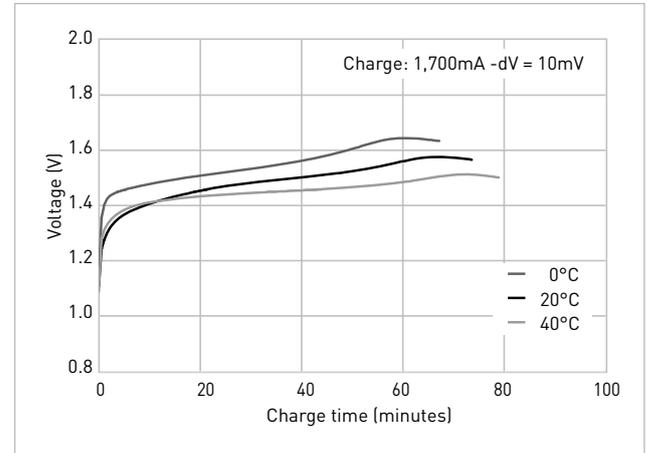

TYPICAL DISCHARGE CHARACTERISTICS

