


BK-150AA
HHR-150AA (OLD)

STANDARD TYPE
AA SIZE (HR15/51)




DIMENSIONS (MM)


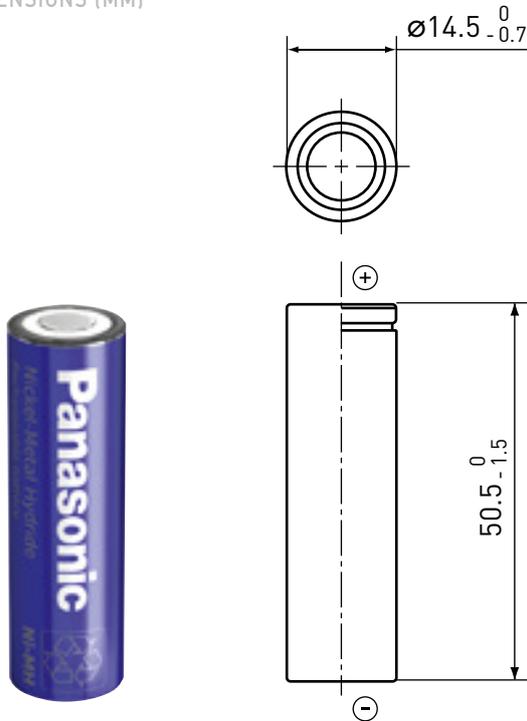


Specifications		BK-150AA
Diameter (mm)		14.5 +0/-0.7
Total height (mm)		50.5 +0/-1.5
Approximate weight (g)		26
Nominal voltage (V)		1.2
Discharge capacity*1	Typical capacity*2 (mAh)	1,580
	Nominal capacity*3 (mAh)	1,500
Approx. internal impedance at 1,000Hz at charged state (mΩ)		23
Charge	Standard (mA x hrs.)	150 x 16
	Rapid*4 (mA x hrs.)	1,500 x 1.2
Charge (°C)	Standard	0 to 45
	Rapid	0 to 40
Discharge (°C)		-10 to 65
Ambient temperature	<1 year	-20 to 35
	<6 months	-20 to 45
	<1 month	-20 to 55
	<1 week	-20 to 65

TYPICAL CHARGE CHARACTERISTICS

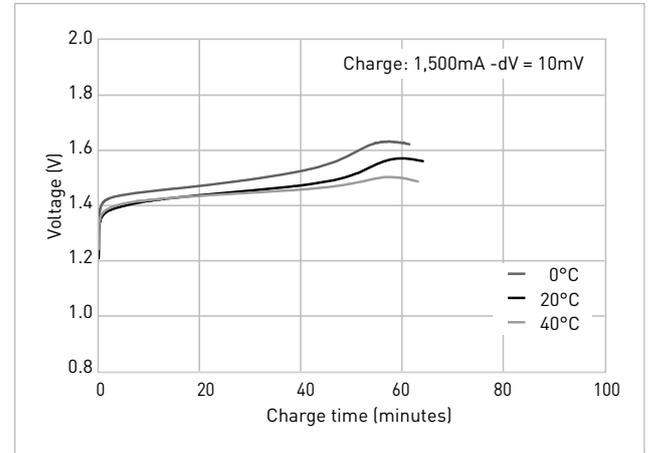

TYPICAL DISCHARGE CHARACTERISTICS

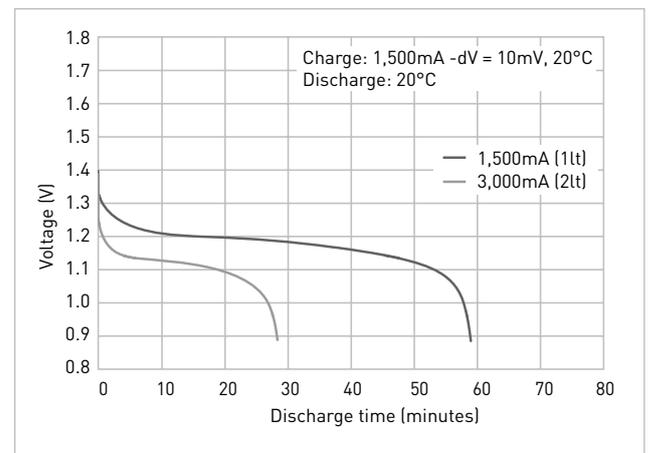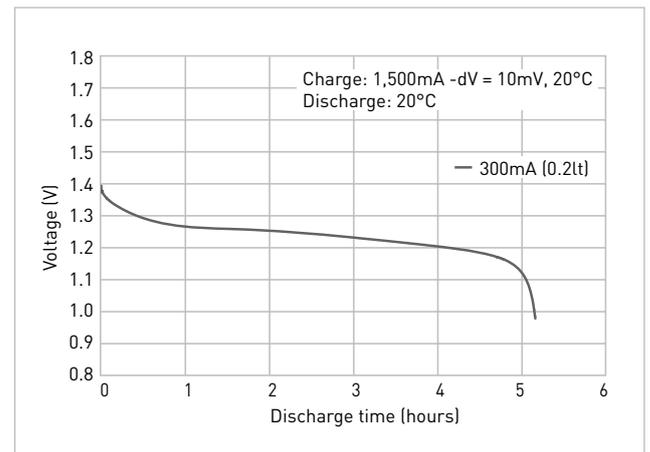

*1 After charging at 0.1It for 16 hours, discharging at 0.2It.
*2 Average capacity (mAh). For reference only.
*3 Rated capacity (mAh).
*4 Need specially designed control system. Please contact Panasonic for details.